


Natura

Line

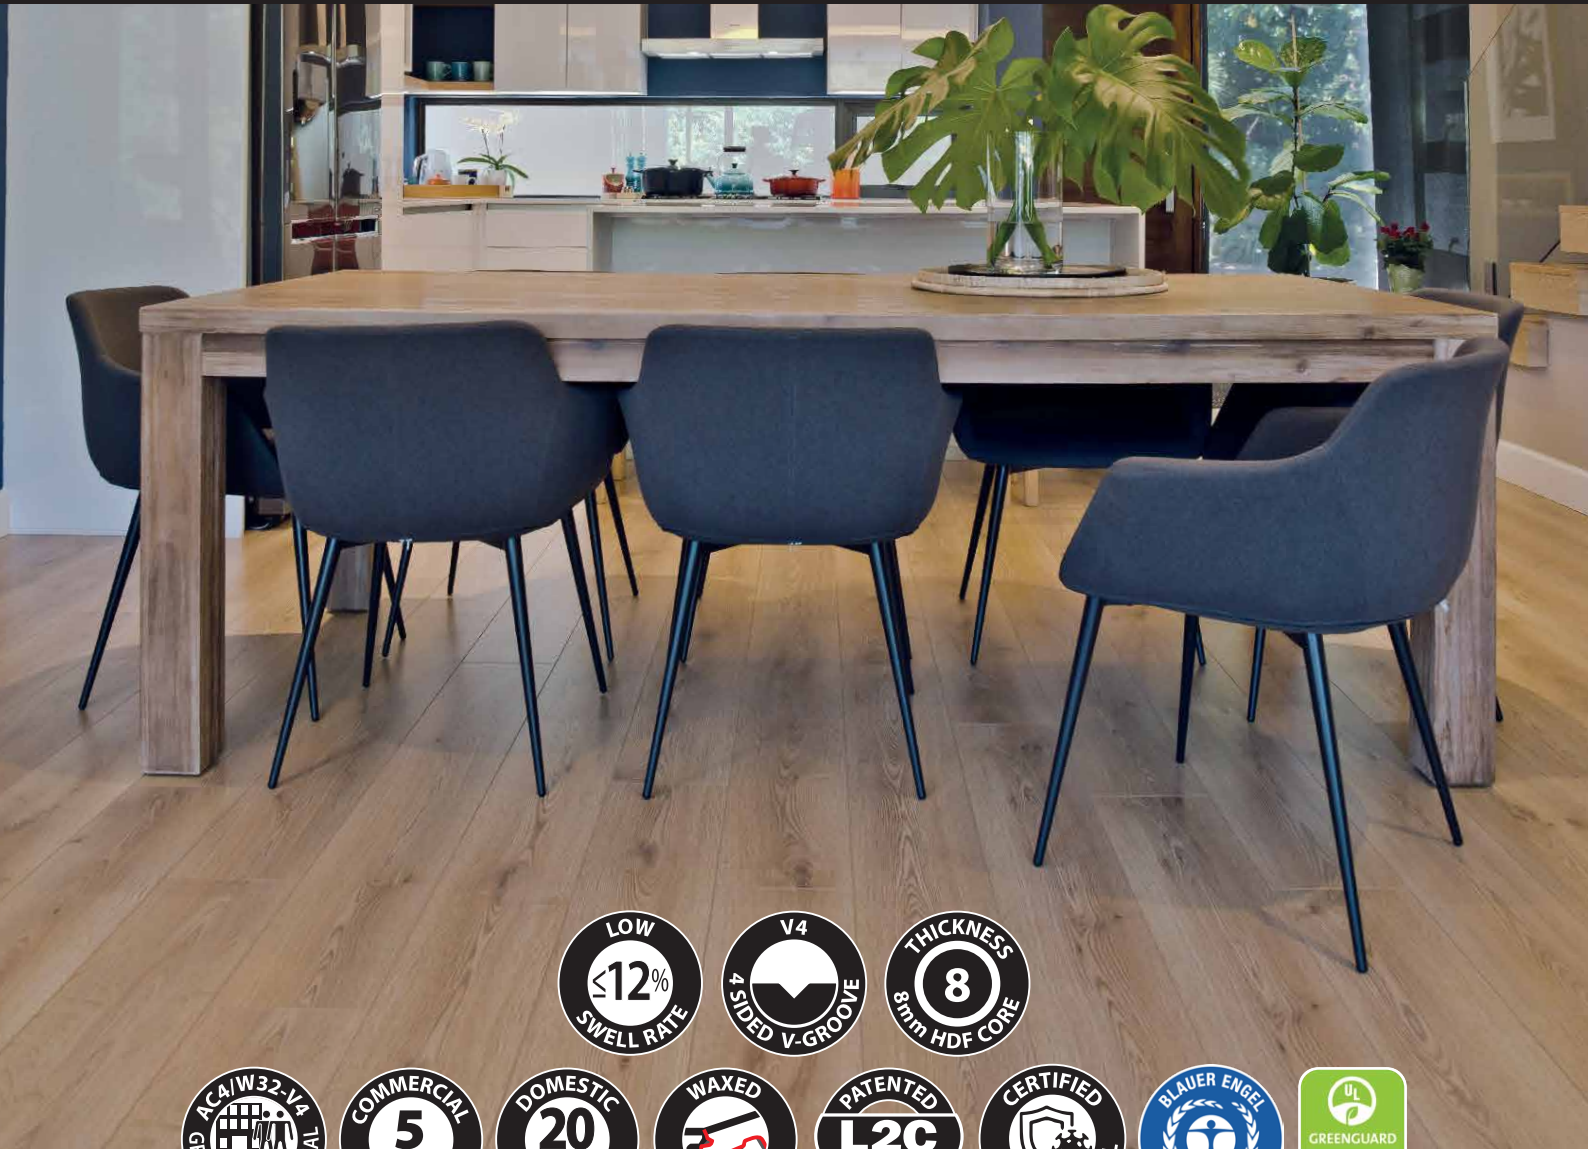

Natura Line AGT laminate


Available in AC4/W32 - V4



Plank dimensions: 8 x 191 x 1200mm (1.83sqm/box)

by
FINfloor™
www.finfloor.co.za

Natura

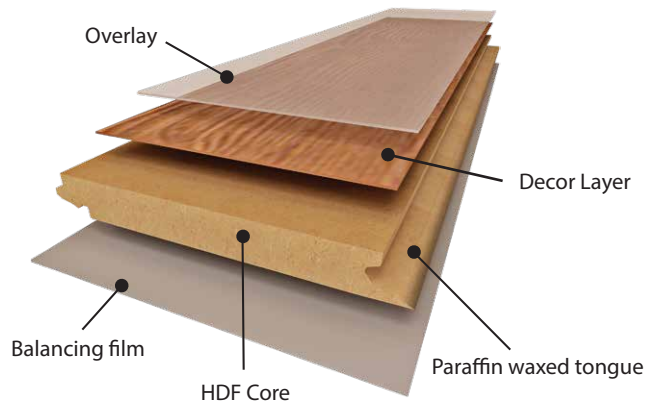Line



SPECIFICATIONS	AC4/W32 - V4
Top surface	Melamine impregnated decorative film. Protected by anti abrasive overlay.
Core material	H.D.F. (High Density Conifer Fibreboard) impregnated with wax treatment for greater water/moisture resistance. Average core density $\geq 850/900\text{kg/m}^3$
Bottom surface	Balancing film
Plank dimensions	8 x 191 x 1200mm
Installation method	Unilin L2C locking system (Glue-less Installation)
Warranty	20 years heavy domestic 5 years general commercial use
Fit for use grading	 AC4/W32 Heavy Domestic  AC4/W32 General Commercial

TECHNICAL DATA	AC4/W32 - V4	
TEST	STANDARD	CHARACTERISTICS/ RESULTS
Abrasion resistance	EN 438	> 4000 Revolutions
Surface soundness	EN 13329	> 1N/mm ²
Scratch resistance	EN 438	> 3,5
UV resistance	EN ISO105	Level 6 -Level 6 - Blue wool standard (No discolouration)
impact resistance	EN 13329	IC 2 for Class 32
Effect of a soft castor chair	EN 425	No change or damage on appearance should occur
Effect of soft castor furniture leg	EN 424	No visible damage should occur
Resistance to hot pots	EN 13329	Class 4
Resistance to cigarette burn	EN 13329	Class 4
Resistance to water vapour	EN 13329	Class 4
Fire classification	EN13501-1/EN14041:2004	Flame-retardant - B1
Stain resistance	EN 13329	Class 5
Thickness swelling test	EN 13329	$\leq 12\%$ swelling
Density	EN 323	850-900 kg/m ³
Static locking strength (Joint strength)	ISO 24334	>590 KG/LM
Anti-bacterial	DIN EN ISO 20743	99.9% effective



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE & FLOORING ASSOCIATION
MEMBER