


FIN Oak

Engineered Hardwood Flooring

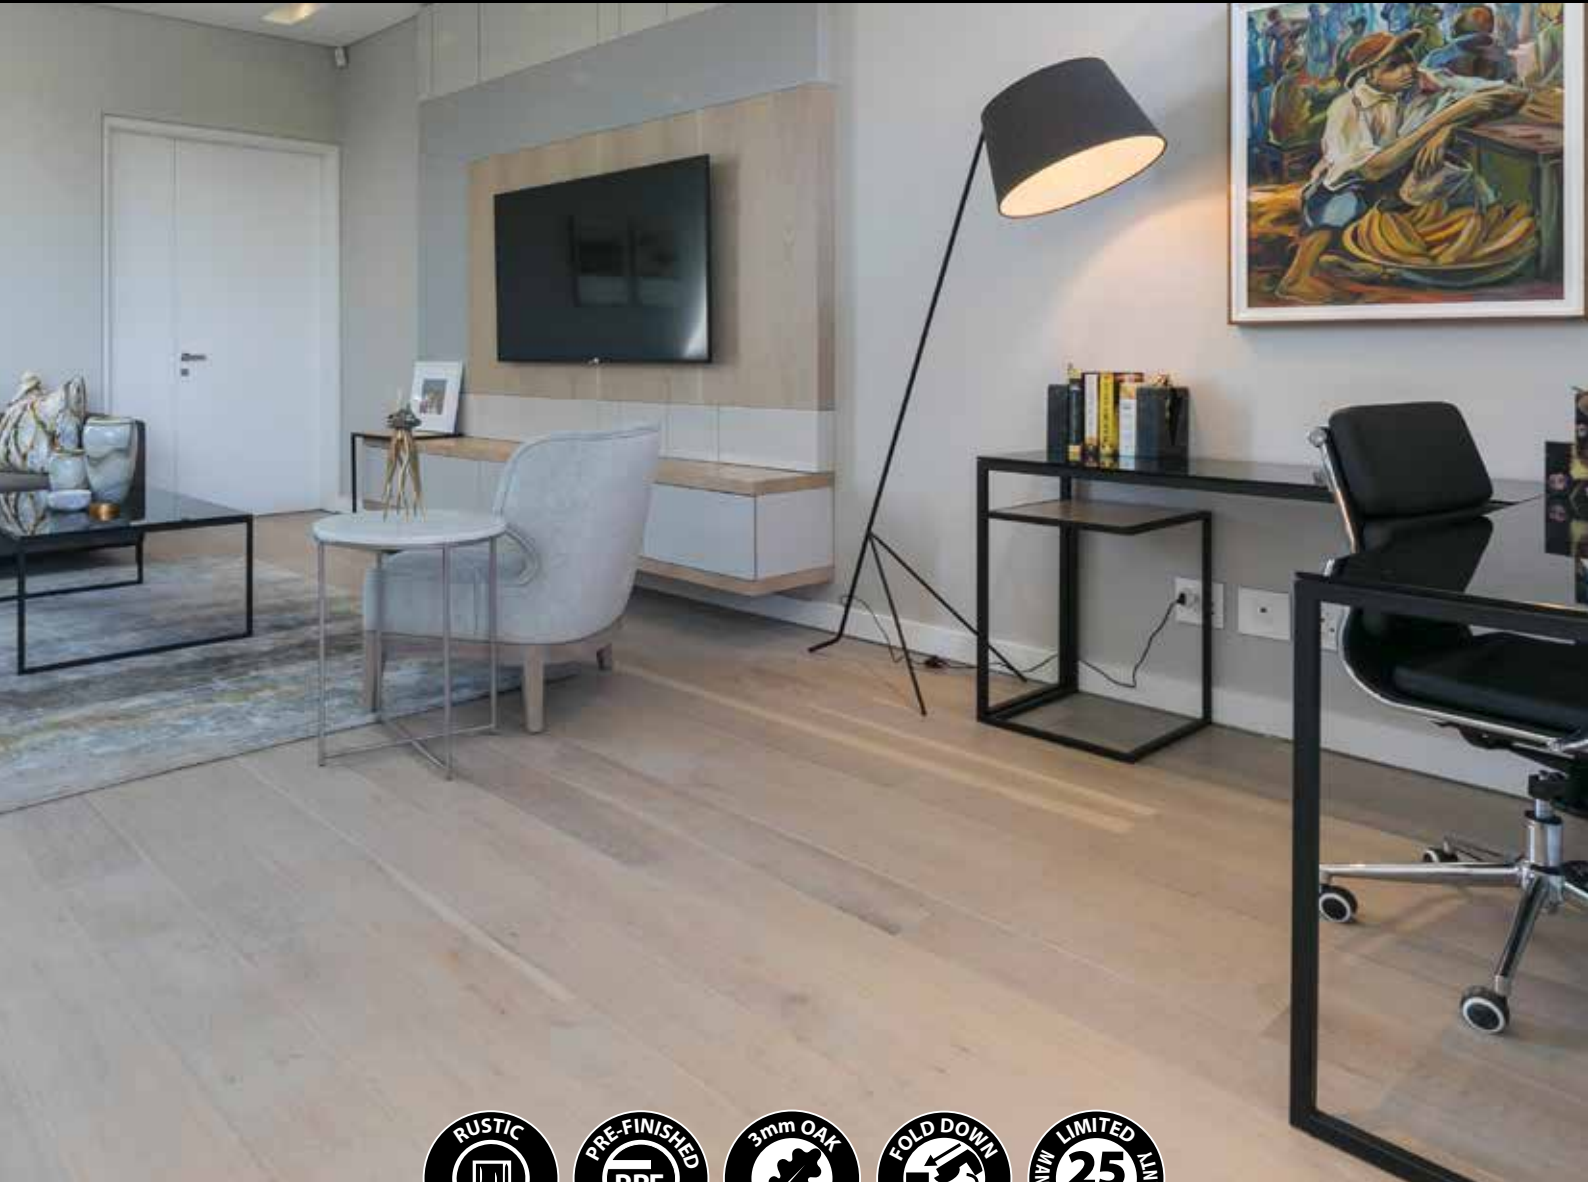

Finoak 14/3mm PRE-FINISHED

Plank dimensions : 1900 x 260 x 14/3mm (3.952m² per box)


by
FINfloor™
www.finfloor.co.za

FIN Oak

Engineered Hardwood Flooring

FINOAK 14/3mm PRE FINISHED		
Length	1900 mm	
Width	260 mm	
Thickness	14 mm	
Top surface	3 mm	
Tolerance	Length	+/- 1.0 mm
	Width	+/- 0.2 mm
	Thickness	+/- 0.2 mm
	Gap	≤ 0.20 mm
	Height difference	≤ 0.15 mm
	Cup warping concave	≤ 0.15%
	Cup warping convex	≤ 0.2%
	Bow warping concave	≤ 0.2%
Bow warping convex	≤ 0.4%	

Pre-Finished

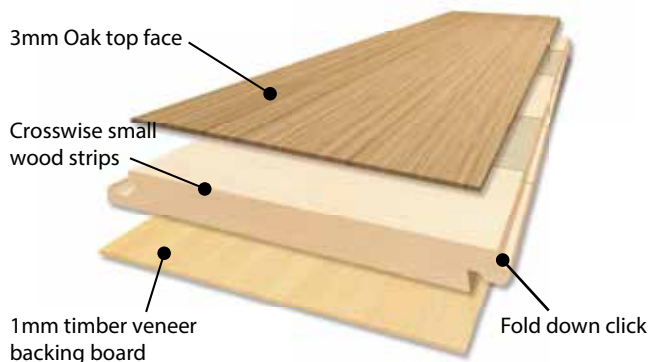

Finished with



FINOAK 14/3 PRE FINISHED TECHNICAL SPECS	
General Construction	3 ply layer
Timber Specification	Oak
Grade	Rustic
Core & Back	Pine Core and Poplar Back
Face Finish / Colour	Sugarbush - Chemical stained, Wax oiled (American wood oil), light brushed finish
	Tsitsikama - Smoked, White Wax oiled (American wood oil), light brushed finish
	Winterberg - Matt laquered, Invisible UV oiled (LOBA), light brushed finish.
Locking System	Fold down click system

LAB TEST to STANDARDS			
Test	Standard reference	Requirement	Test Data
Reaction to fire	EN13501-1		Dfl-S1
Release of formaldehyde	EN717-1	≤0.124 mg/m ³	≤0.018 mg/m ³

Accuracy of colour and wood characteristics: whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are as accurate as possible these images may vary from the actual product.

Rustic grade comes with: An unlimited number of knots (up to 50mm). Fallen knots are filled with beige/oak filler. Small hollows are acceptable. Exposed central core is allowed. Oak grain pattern is heavily exposed which will/could cause colour unevenness.



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE & FLOORING ASSOCIATION
MEMBER