

# GALAXY

Glue down LVT



## Galaxy Glue down LVT

Commercial glue down luxury vinyl tile


Plank dimensions: 1227 x 235 x 2.5mm (4.33sqm/box)

by

**FIN**floor™  
www.finfloor.co.za

# GALAXY

## Glue down LVT

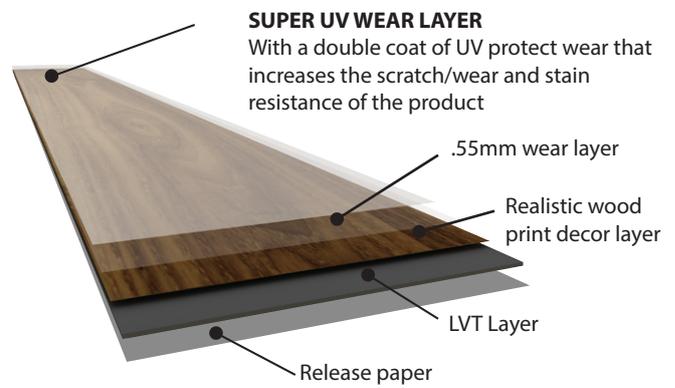

SPECIFICATIONS	GLUE DOWN VINYL TECHNOLOGY
Thickness	2.5mm
Wear layer	.55mm wear layer
Plank dimensions	1227 x 235 x 2.5mm
Packaging Unit	15 pieces per box / 4.33m <sup>2</sup>
Texture option/Surface finish	Antique wood finish and 4-sided micro bevel
Installation method	Glue down installation
Warranty	30 years heavy domestic and 10 years general commercial use
Application	Heavy Commercial
Waterproof	100%

TEST	EN NORMS	RESULT	ASTM NORMS	RESULT
Dimensional squareness and straightness	EN427	Squareness: 0.18mm Straightness: 0.07mm		
Dimensional stability	EN434	Pass	ASTM F2199	Pass
Impact resistance			ASTM F1265, ASTM D2632	Pass
Abrasion group / wear resistance	EN660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Residual Indentation	EN433	Pass, 0.06mm	ASTMF1914, ASTM F970	Pass
Colour fastness to artificial light	EN20105:B02	Pass > Grade 6	ASTMF1515	Pass
Slip resistance	EN12893	Class DS	ASTM D2047-93	Pass
Sound Reductions	ENISO717-2(ΔLw)	2dB		
Fire classification	ENISO11925-2 EN13501-1 ENISO 9239-1	Bf1-S1	ASTME648-10	Pass/Class1
Electrical resistance	EN1081 Method C	Pass	ASTM F150-06	Pass
Thermal resistance	EN12664	Pass		
Toxic Element Test	EN71-3	Pass, Not Toxic and Does not contain heavy metals and formaldehyde		
Recycled materials	No		No	

INSTALLATION	GLUE DOWN INSTALLATION AND MAINTENANCE GUIDELINE
Caution	Do not expose to direct sunlight. Cover windows
Installation	Adhere to manufacturers installation parameters and read the installation instructions
Cleaning & Maintenance	Only use non-abrasive detergents and a micro-fibre mop Avoid excess exposure to water

### CERTIFICATES















EN ISO 10582 - Fit for use classification



Heavy Commercial  
(Class 33)