

FIN Oak

Engineered Hardwood Flooring



Oleum offer over 60 colours to choose from

10/2mm OLEUM PRE-FINISHED

Plank dimensions: 1210 x 192 x 10/2mm (1.626sqm/box)



15/4mm OLEUM PRE-FINISHED

Plank dimensions: 1900 x 190 x 15/4mm (2.88sqm/box)

Plank dimensions: 2200 x 220 x 15/4mm (2.904sqm/box)

Plank dimensions: 2200 x 260 x 15/4mm (3.432sqm/box)




Oleum PRE-FINISHED

by
FINfloor™
www.finfloor.co.za

FINOAK 10/2mm OLEUM PRE FINISHED

SPECIFICATIONS


Length	1220mm
Width	192mm
Thickness	10mm
Top surface	2mm wire brushed European Oak
General Construction	3 layer with a HDF Core
Timber Specification	Oak
Grade	Rustic
Locking System	Välinge 2G (Glue-less installation)
Warranty	25 years limited residential warranty

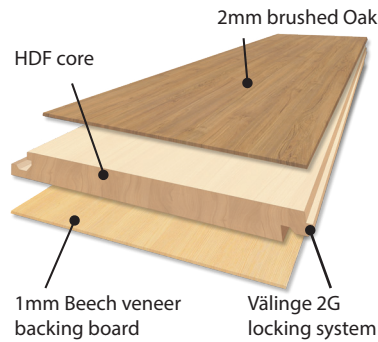

Finished with: Jax Oleum Oils plus water based 2K matt varnish durable, water & stain resistant sealer



FINOAK 15/4mm OLEUM PRE FINISHED

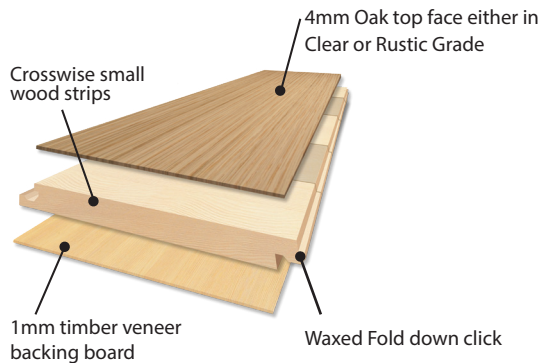

Finished with: Jax Oleum Oils plus water based 2K matt varnish durable, water & stain resistant sealer



SPECIFICATIONS	190 CLEAR	190 RUSTIC	220 RUSTIC	260 RUSTIC
Length	1900mm	1900mm	2200mm	2200mm
Width	190mm	190mm	220mm	260mm
Thickness	15mm	15mm	15mm	15mm
Top surface	4mm	4mm	4mm	4mm
General Construction	3 ply layer	3 ply layer	3 ply layer	3 ply layer
Timber Specification	Oak	Oak	Oak	Oak
Grade	Clear	Rustic	Rustic	Rustic
Locking System	Waxed fold down click	Waxed fold down click	Waxed fold down click	Waxed fold down click
Warranty	25 years limited residential	25 years limited residential	25 years limited residential	25 years limited residential

Tolerance

Length	+/- 1.0 mm	+/- 1.0 mm	+/- 1.0 mm	+/- 1.0 mm
Width	+/- 0.2 mm	+/- 0.2 mm	+/- 0.2 mm	+/- 0.2 mm
Thickness	+/- 0.2 mm	+/- 0.2 mm	+/- 0.2 mm	+/- 0.2 mm
Gap	≤ 0.20 mm	≤ 0.20 mm	≤ 0.20 mm	≤ 0.20 mm
Height difference	≤ 0.15 mm	≤ 0.15 mm	≤ 0.15 mm	≤ 0.15 mm
Cup warping concave	≤ 0.15%	≤ 0.15%	≤ 0.15%	≤ 0.15%
Cup warping convex	≤ 0.2%	≤ 0.2%	≤ 0.2%	≤ 0.2%
Bow warping concave	≤ 0.2%	≤ 0.2%	≤ 0.2%	≤ 0.2%
Bow warping convex	≤ 0.4%	≤ 0.4%	≤ 0.4%	≤ 0.4%

Accuracy of colour and wood characteristics: whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are as accurate as possible these images may vary from the actual product.

Rustic grade comes with: An unlimited number of knots (up to 50mm). Fallen knots are filled with beige/oak filler. Small hollows are acceptable. Exposed central core is allowed. Oak grain pattern is heavily exposed which will/could cause colour unevenness.



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE
& FLOORING ASSOCIATION
MEMBER