


Bella Neo

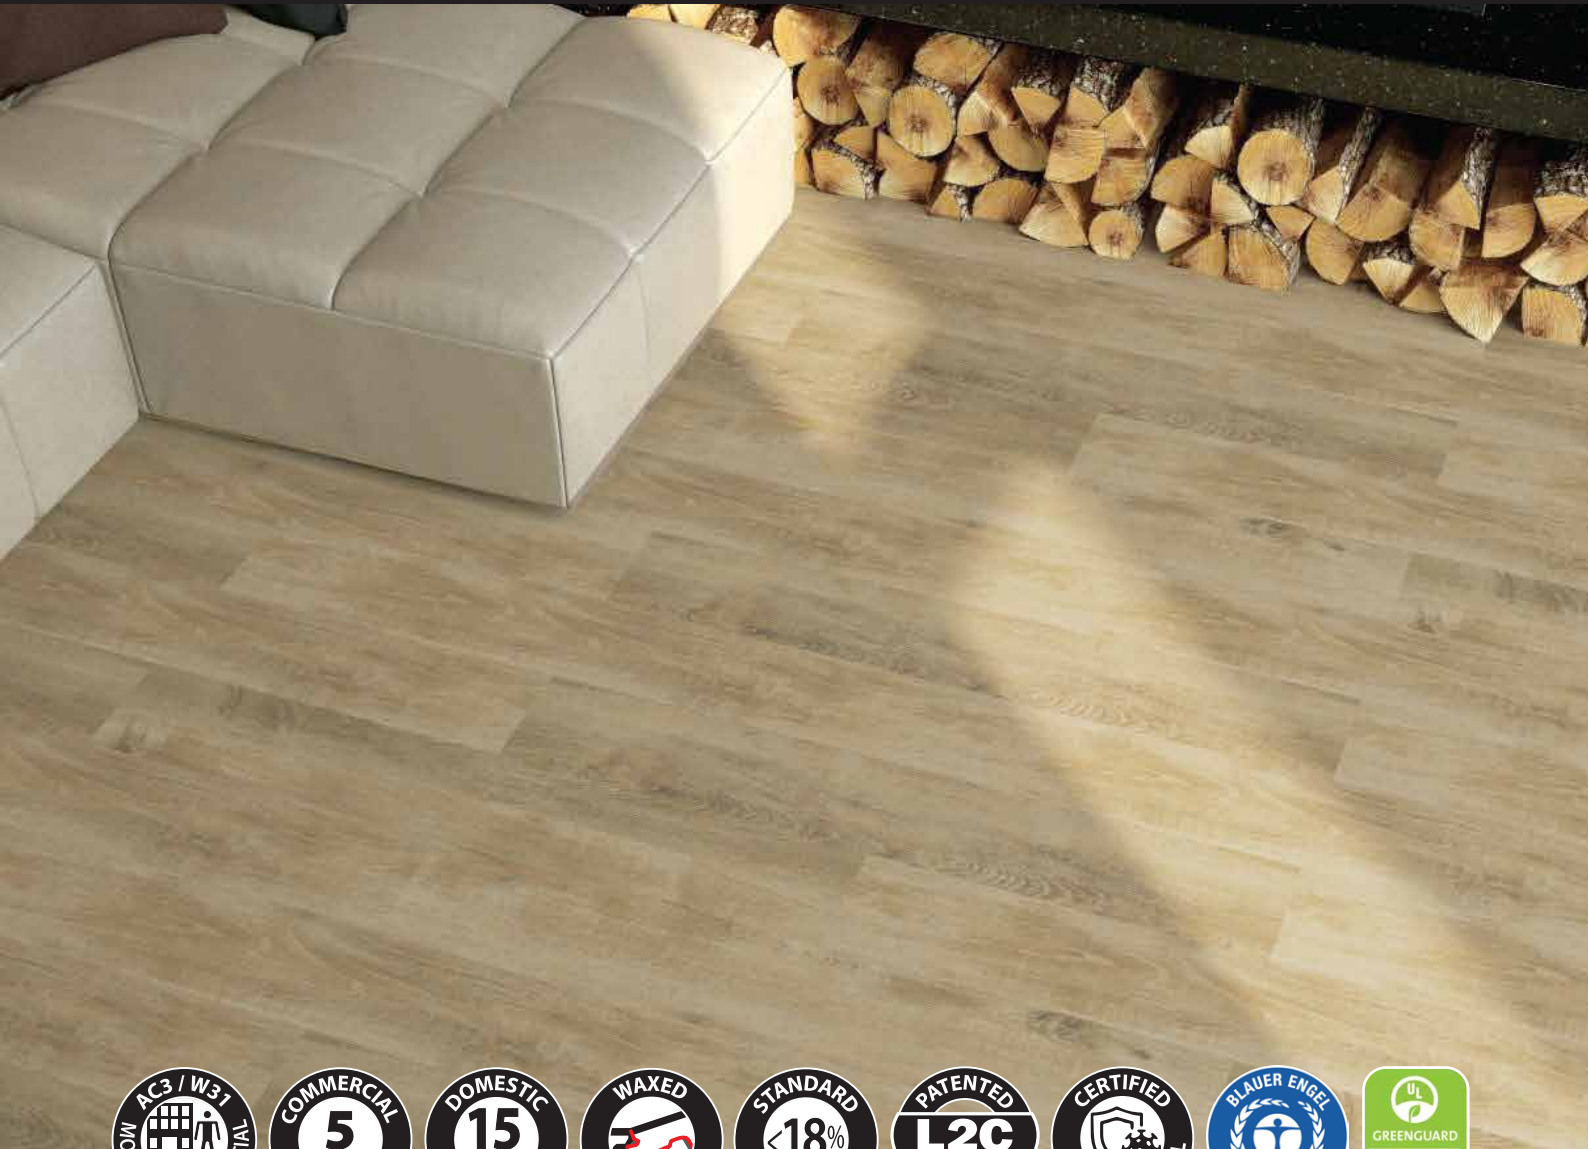

AGT Bella NEO laminate

Available in AC3/W31 - Square edge


Plank dimensions: 1200 x 191 x 8mm (2.292 sqm/box)

by

FINfloor™

www.finfloor.co.za

Bella Neo

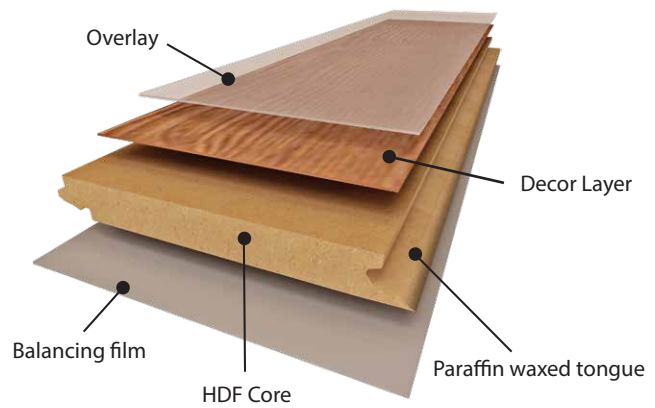

SPECIFICATIONS

AC3/W31 - Square Edge

| | |
|---------------------|--|
| Top surface | Melamine impregnated decorative film. Protected by anti abrasive overlay. |
| Core material | H.D.F. (High Density Conifer Fibreboard) with Paraffin waxed tongue for increased water and noise resistance. Average core density $\geq 860-880\text{kg/m}^2$ |
| Bottom surface | Balancing film |
| Plank dimensions | 1200 x 191 x 8mm |
| Installation method | Unilin L2C locking system (Glue-less Installation) |
| Warranty | 15 years heavy residential 5 years moderate commercial use |
| Fit for use grading | AC3/W31 Heavy Residential AC3/W31 Moderate Commercial |

TECHNICAL DATA

AC3/W31 - Square Edge

| TEST | STANDARD | CHARACTERISTICS/ RESULTS |
|-------------------------------------|--------------------|--|
| Abrasion resistance | EN 438 | > 2000 Revolutions |
| Surface soundness | EN 13329 | $S > 1 \text{ N/mm}^2$ |
| UV resistance | EN ISO4892 - 2:200 | Colour contrast between exposed & unexposed ≥ 4 of Grey scale according to EN 20105 - A02 |
| Impact resistance | EN 13329 | IC 1 for Class 31 |
| Effect of a soft castor chair | EN 425 | No change or damage on appearance should occur |
| Effect of soft castor furniture leg | EN 424 | No visible damage should occur |
| Resistance to hot pots | EN 13329 | Class 4 |
| Resistance to cigarette burn | EN 13329 | Class 4 |
| Resistance to water vapour | EN 13329 | Class 4 |
| Fire classification | TS EN13501-1:2019 | Flame-retardant - Cfl-s1 |
| Stain resistance | EN 13329 | Class 5 |
| 24 hour thickness swelling test | EN 13329 | $\leq 18\%$ swelling |
| Density | EN 325 | 860-880 kg/m^2 |
| Anti-bacterial | DIN EN ISO 20743 | 99.9% effective |



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE & FLOORING ASSOCIATION
MEMBER

