


FIN Oak

Engineered Hardwood Flooring

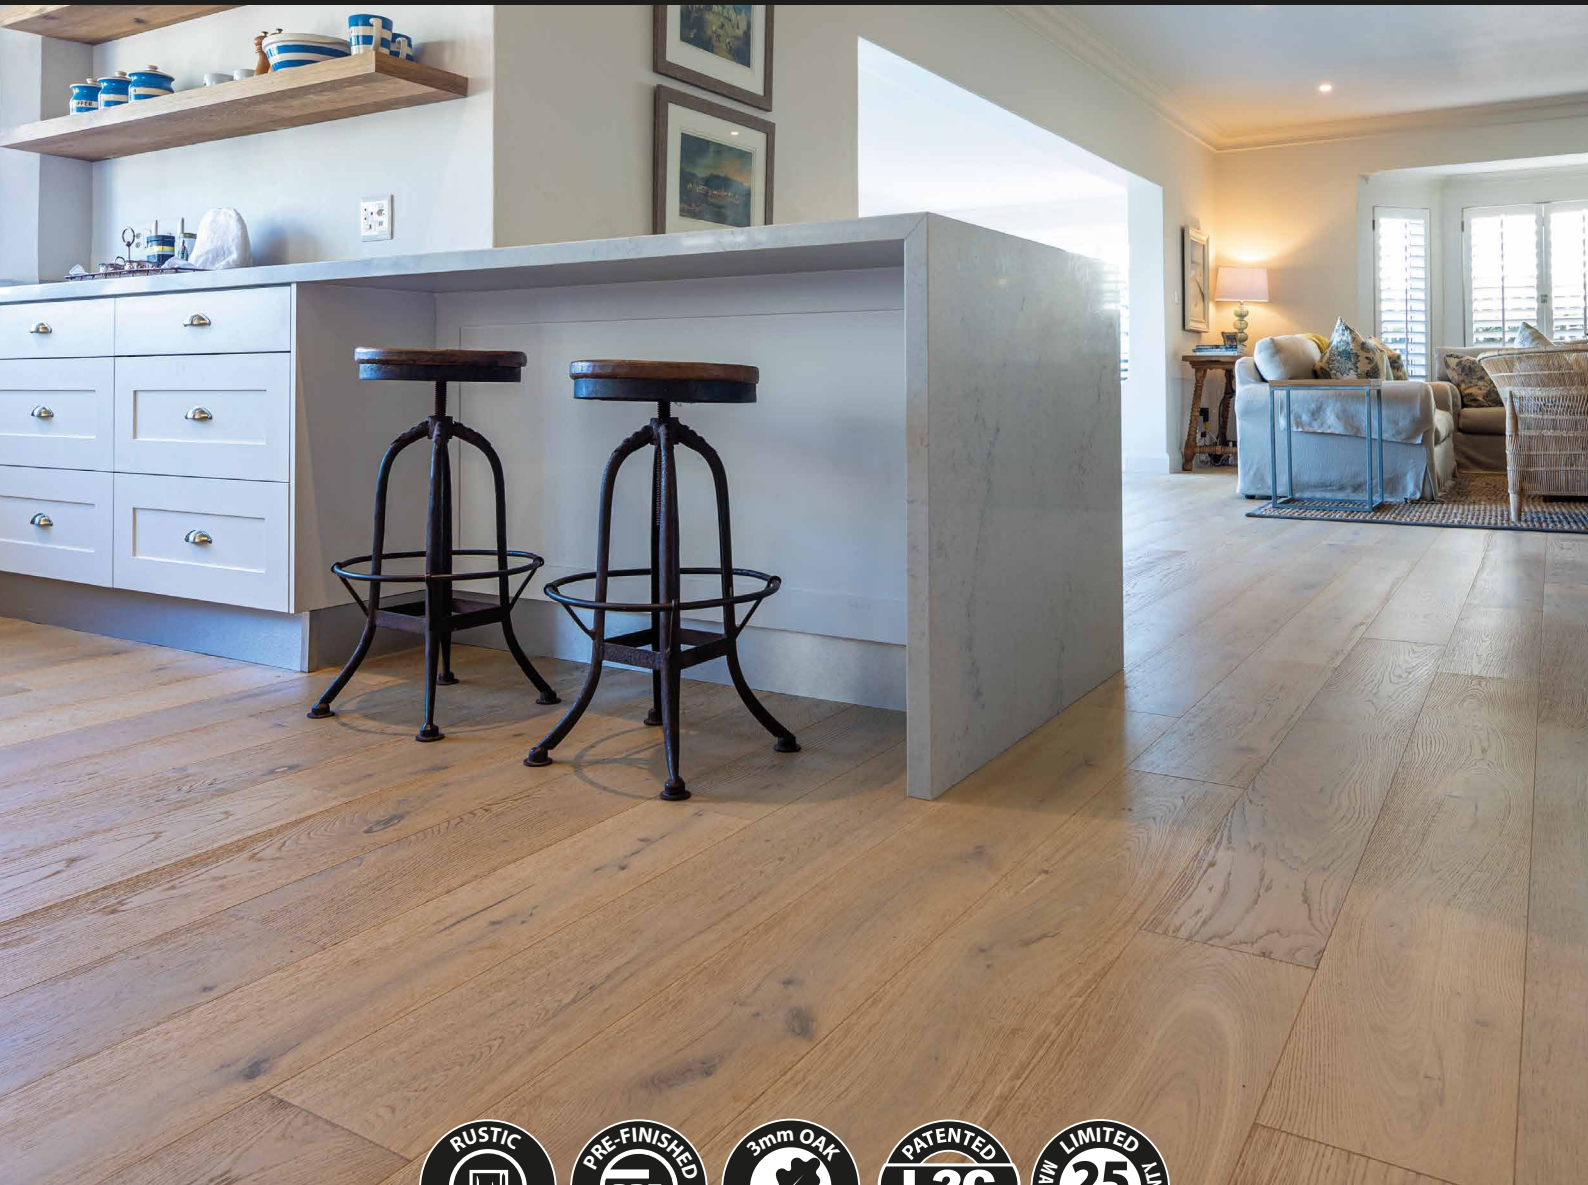

Finoak 14/3mm PRE-FINISHED

Plank dimensions : 1900 x 190 x 14/3 Rustic grade

by
FINfloor™
www.finfloor.co.za


FIN Oak

Engineered Hardwood Flooring

FINOAK 15/4mm PRE FINISHED

Length	1900 mm	
Width	190 mm	
Thickness	14 mm	
Top surface	3 mm	
Tolerance	Length	+/- 1.0 mm
	Width	+/- 0.2 mm
	Thickness	+/- 0.2 mm
	Gap	≤ 0.20 mm
	Height difference	≤ 0.15 mm
	Cup warping concave	≤ 0.15%
	Cup warping convex	≤ 0.2%
	Bow warping concave	≤ 0.2%
Bow warping convex	≤ 0.4%	

Pre-Finished

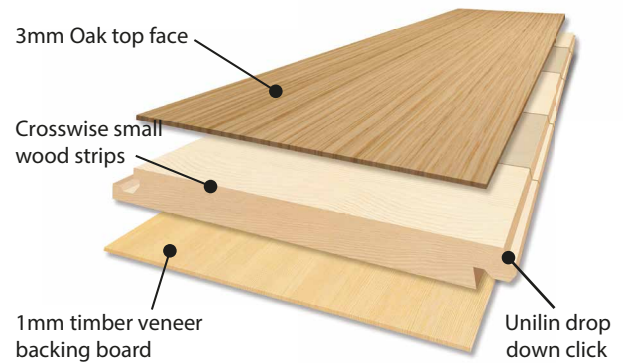

Finished with:



FINOAK 15/4 PRE FINISHED TECHNICAL SPECS

General Construction	3 ply layer
Timber Specification	Oak
Grade	Rustic
Core & Back	Poplar
Face Finish / Colour	Tafelberg - Brushed, White Matt lacquered (Bergolin) - FINmist - Grey finish
	Amatola - Brushed, Matt Lacquered (Bergolin) - Natural finish
	Lebombo - Brushed, Invisible Lacquered (Proff + Berlogin)
Locking System	Licensed Unilin drop down click system

LAB TEST to STANDARDS

Test	Standard reference	Requirement	Test Data
Moisture Content	EN 13183-1	7±2%	8,40%
Width - permit deviation	EN13647	±0.2 mm	0 mm
Reaction to fire	EN13501-1		Dfl-S1
Release of formaldehyde	EN717-1	≤0.124 mg/m ³	≤0.008 mg/m ³
Emission of pentachlorophenol	CEN/TR 14823	≤5 ppm	≤5 ppm

Accuracy of colour and wood characteristics: Whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are accurate as possible these images may vary from the actual product.

Rustic grade comes with: Diverse grain and colour variations with a limited number of cracks and living knots (up to 100mm). Fallen knots are filled with light and dark colour matched filler for an even overall appearance.



SAWLFA
SOUTHERN AFRICAN WOOD, LAMINATE & FLOORING ASSOCIATION
PRODUCT CONFORMS TO SAWLFA GUIDELINE FOR SA MARKET