


FIN Oak

Engineered Hardwood Flooring

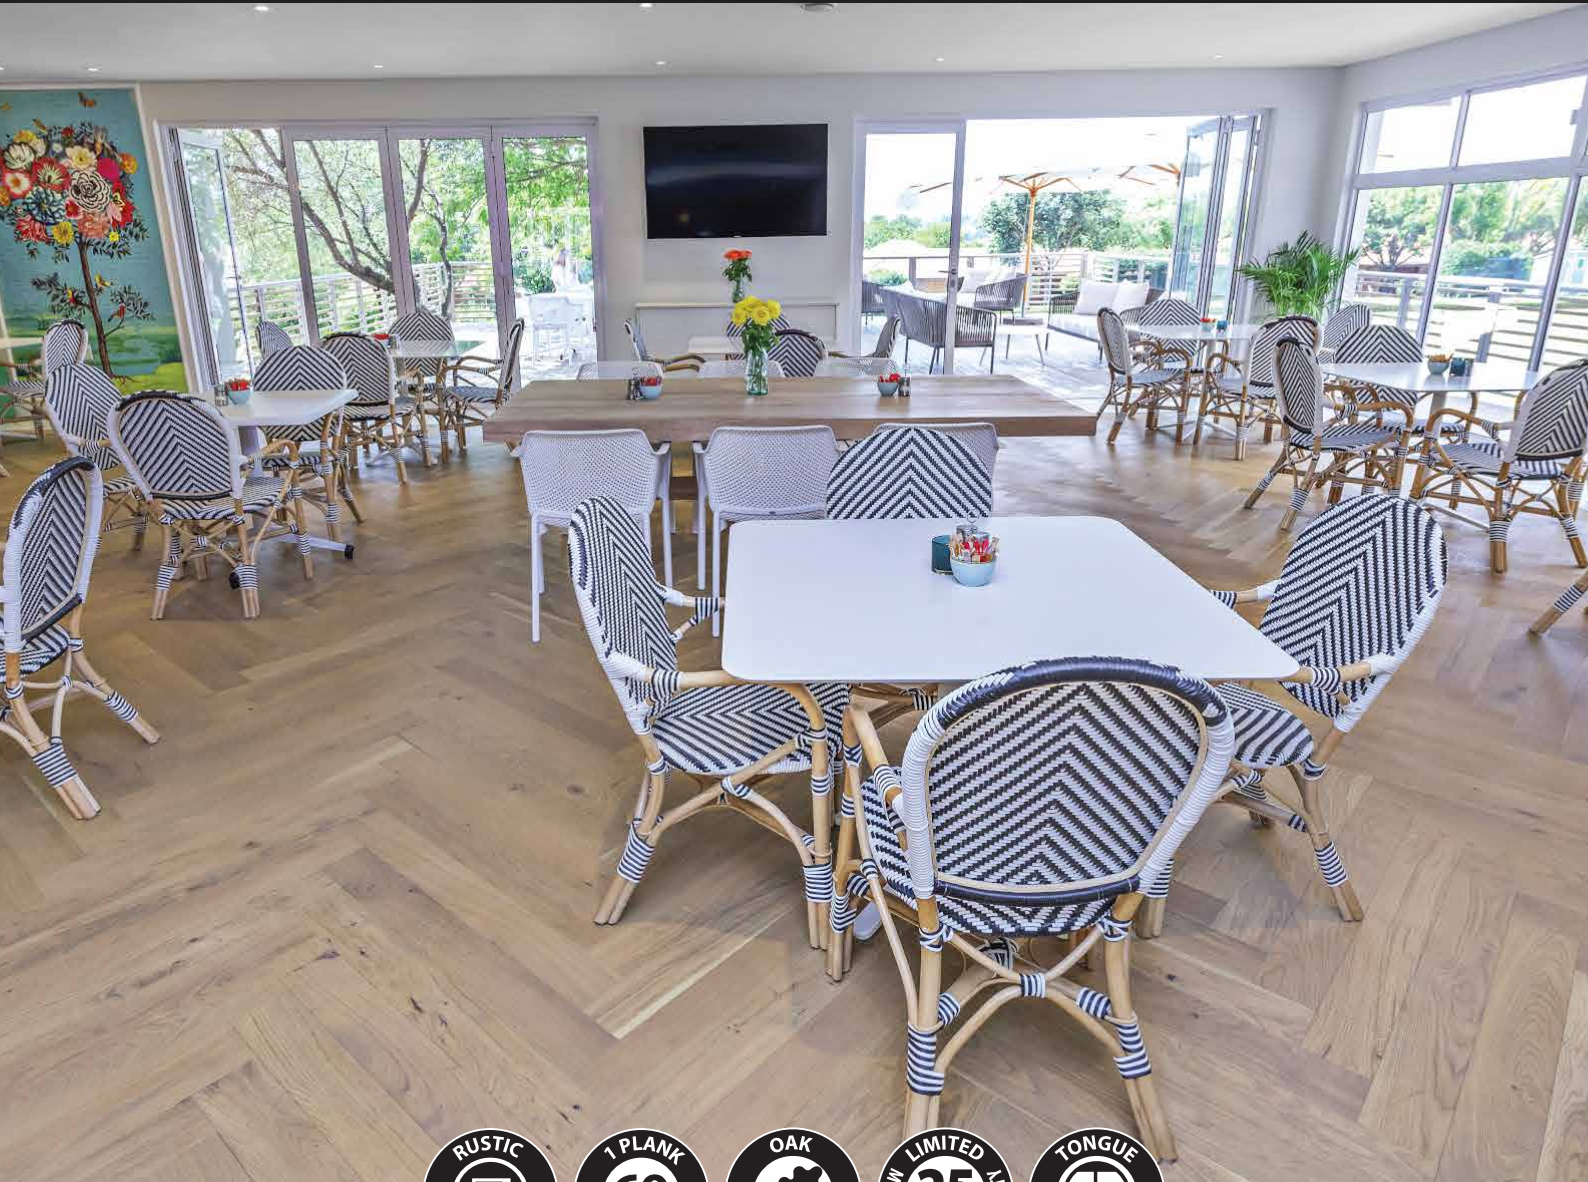

Finoak 14/3mm Herringbone

600 x 125 x 14/3mm (1.5m²/ box)

by
FINfloor[™]
www.finfloor.co.za


FIN Oak

Engineered Hardwood Flooring

FINOAK 14/3mm HERRINGBONE UNFINISHED

Length	600 mm	
Width	125 mm	
Thickness	14 mm	
Top surface	3 mm	
Tolerance	Length	+/- 1.0 mm
	Width	+/- 0.2 mm
	Thickness	+/- 0.2 mm
	Gap	≤ 0.20 mm
	Height difference	≤ 0.15 mm
	Cup warping concave	≤ 0.15%
	Cup warping convex	≤ 0.2%
	Bow warping concave	≤ 0.2%
Bow warping convex	≤ 0.4%	

RUSTIC GRADE - UNFINISHED

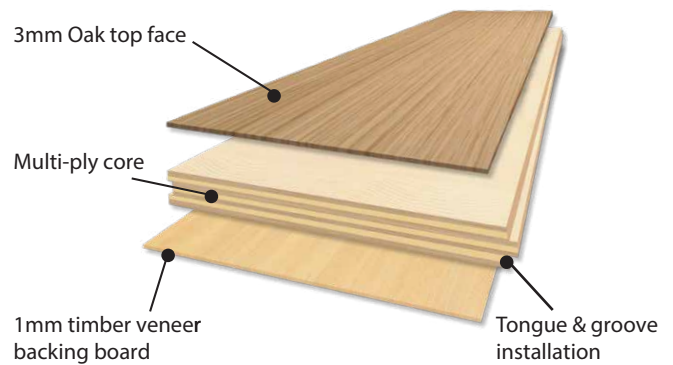

Planks are supplied **unfinished**.
Finishing with our preferred
finishing and oiling partners -



FINOAK 14/3mm HERRINGBONE UNFINISHED

General Construction	Multi-ply
Timber Specification	European Oak
Grade	Rustic grade
Core & Back	Poplar and Eucalyptus
Face Finish / Colour	Unfinished
Locking System	Tongue and groove

LAB TEST to STANDARDS

Test	Standard reference	Requirement	Test Data
Moisture Content	EN 13183-1	8±1%	7,90%
Width - permit.deviation	EN13647	±0.2 mm	0 mm
Release of formaldehyde	GB 18580-2001	≤ 1.5 mg/L	0.02 mg/L



Accuracy of colour and wood characteristics: whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are as accurate as possible these images may vary from the actual product.

Rustic grade comes with: An unlimited number of knots (up to 50mm). Fallen knots are filled with beige/oak filler. Small hollows are acceptable. Exposed central core is allowed. Oak grain pattern is heavily exposed which will/could cause colour unevenness.

