

GALAXY II

Glue down LVT



- 5MM WEAR LAYER .5
- 230MM - WIDE PLANKS WIDE
- 100% VIRGIN MATERIAL VIRGIN MATERIAL
- 100% WATER PROOF
- 100% PHTHALATE FREE CERTIFIED
- SCRATCH RESISTANT UV SUPER UV COATING
- INSTALLATION LOCATIONS
- DOMESTIC LIFE TIME WARRANTY
- HEAVY COMMERCIAL 10 YEAR WARRANTY


Galaxy II
Commercial glue down luxury vinyl tile

Plank dimensions: 2.5 x 230 x 1526 mm (4.91sqm/box)

by
FINfloorTM
www.finfloor.co.za

GALAXY II

Glue down LVT

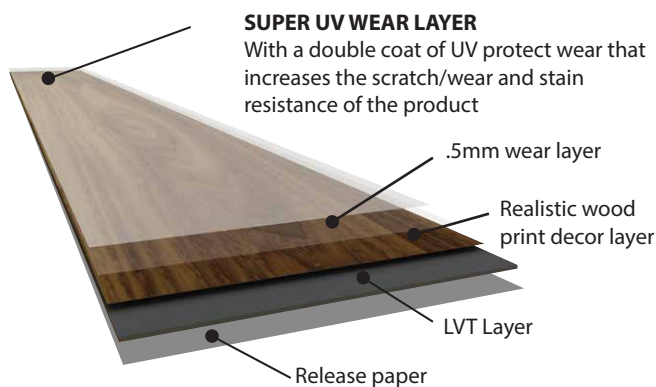

SPECIFICATIONS	GLUE DOWN VINYL TECHNOLOGY
Thickness	2.5mm
Wear layer	.5mm wear layer
Plank dimensions	2.5 x 230 x 1526mm
Packaging Unit	14 pieces per box / 4.91m ²
Texture option/Surface finish	Antique crystal wood texture or EIR and painted bevel
Installation method	Glue down installation
Warranty	Life time* heavy domestic and 10 years Heavy Commercial use
Application	Heavy Commercial
Waterproof	100% topically waterproof

*The Lifetime structural residential warranty protects against product wear out and manufacturing defects.

TECHNICAL DATA	GLUE DOWN VINYL TECHNOLOGY	
TEST	EN NORMS	RESULT
Dimensional squareness and straightness	EN427	Squareness: 0.15mm Straightness: 0.30mm
Dimensional stability	EN434	Pass
Impact resistance	EN13329	Pass
Abrasion group / wear resistance	EN660-1/2	Group T
Residual Indentation	EN433	Pass, 0.06mm
Colour fastness to artificial light	EN20105:B02	Pass > Grade 6
Slip resistance	EN12893	Class DS
Sound Reductions	ENISO717-2(ΔLw)	4dB
Fire classification	ENISO11925-2 EN13501-1 ENISO 9239-1	Bf1-S1
Electrical resistance	EN1081 Method C	Pass
Thermal resistance	EN12664	Pass
Toxic Element Test	EN71-3	Pass, Not Toxic and Does not contain heavy metals and formaldehyde
Recycled materials	No	

INSTALLATION	GLUE DOWN INSTALLATION AND MAINTENANCE GUIDELINE
Caution	Do not expose to direct sunlight. Cover windows
Installation	Adhere to manufacturers installation parameters and read the installation instructions
Cleaning & Maintenance	Only use non-abrasive detergents and a micro-fibre mop Avoid excess exposure to water

CERTIFICATES

MEMBER OF



EN ISO 10582 - Fit for use classification



Heavy Commercial
(Class 33)



SAWLFA
Flooring Association